

Electric Conveyors

	Transport		Lowered				20 Degrees				25 Degrees				Max
	C	D	A	B	C	D	A	B	C	D	A	B	C	D	A
1540	44'-5"	9'-1"	7'-11"	17'-8"	44'-1"	9'-10"	11'-5"	17'-1"	43'-3"	13'-3"	16'-8"	16'-6"	41'-5"	18'-6"	18'-6"
1545	51'-3"	11'-9"	10'-10"	17'-5"	48'-7"	12'-9"	13'-2"	16'-11"	47'-11"	15'	17'-2"	16'-2"	46'-7"	19'	19'-2"
1550	54'-2"	11'-7"	10'-6"	22'	53'-9"	12'-6"	14'-11"	21'-3"	52'-7"	16'-8"	19'-4"	20'-9"	51'	21'-2"	19'-10"
1555	61'-2"	12'-5"	11'-4"	24'-1"	58'-9"	13'-2"	16'-7"	23'-2"	57'-4"	18'-5"	21'-5"	22'-5"	55'-8"	23'-3"	22'-2"

Self-Propelled Conveyors

	Transport		Lowered				20 Degrees				25 Degrees				Max
	C	D	A	B	C	D	A	B	C	D	A	B	C	D	A
1540	44'-5"	9'-1"	7'-11"	17'-8"	44'-1"	9'-10"	11'-5"	17'-1"	43'-3"	13'-3"	16'-8"	16'-6"	41'-5"	18'-6"	18'-6"
1545	51'-3"	11'-9"	10'-10"	17'-5"	48'-7"	12'-9"	13'-2"	16'-11"	47'-11"	15'	17'-2"	16'-2"	46'-7"	19'	19'-2"
1550	54'-2"	11'-7"	10'-6"	22'	53'-9"	12'-6"	14'-11"	21'-3"	52'-7"	16'-8"	19'-4"	20'-9"	51'	21'-2"	19'-6"
1555	61'-2"	12'-5"	11'-4"	24'-1"	58'-9"	13'-2"	16'-7"	23'-2"	57'-4"	18'-5"	21'-5"	22'-5"	55'-8"	23'-3"	22'-2"

PRO-CONVEYOR DETAILS AND INFORMATION

	1540	1545	1550	1555
Capacity	9000 BU/HR	9000 BU/HR	9000 BU/HR	9000 BU/HR
<i>(Capacity is subject to material, moisture, density, and angle)</i>				
Recommended HP - Electric	10 (1 PH/3 PH)	12.5 (1 PH)	12.5 (1 PH)	14 (1 PH)
		15 (3 PH)	15 (3 PH)	15 (3 PH)

DIMENSIONS

Belt Width	15"	15"	15"	15"
Conveyor Length	40'	45'	50'	55'
Wheel Track Width	7'-10"	7'-10"	7'-10"	7'-10"
Total Weight	2400 lbs	2500 lbs	2600 lbs	2700 lbs
Total Weight with Mover Kit	3400 lbs	3550 lbs	3700 lbs	3850 lbs
Tube Diameter	10"	10"	10"	10"
Tire Size	ST205/75R15	ST205/75R15	ST205/75R15	ST205/75R15



Made in the U.S.A.

1500 Series

Field Loader with Self-Propelled Kit

Conveyor Capacity of Over 9,000 Bushels Per Hour!

(Capacity is subject to material, moisture, density, and angle)
 Premiere Ag's Pro-Conveyors are manufactured in North Dakota with a strong focus on detail, quality, and reliability.

1500 Series


Electric Field Loader

Conveyor Capacity of Over 9,000 Bushels Per Hour!

(Capacity is subject to material, moisture, density, and angle)
 At Premiere Ag it is our mission to produce conveyors with the highest quality materials to ensure years of use and bring you higher capacities to help your operations efficiency.

Self-propelled conveyors are equipped with a 25-gallon hydraulic tank and a 12-gallon gas tank. The hydraulic system enables you to operate the conveyor from a single location, facilitating easy maneuverability around your operation. Built with 12-gauge tubing to ensure strength and longevity.

Electric conveyors give you the option of single phase power or three phase power to match you operations needs. Built with 12-gauge tubing to ensure strength and longevity.

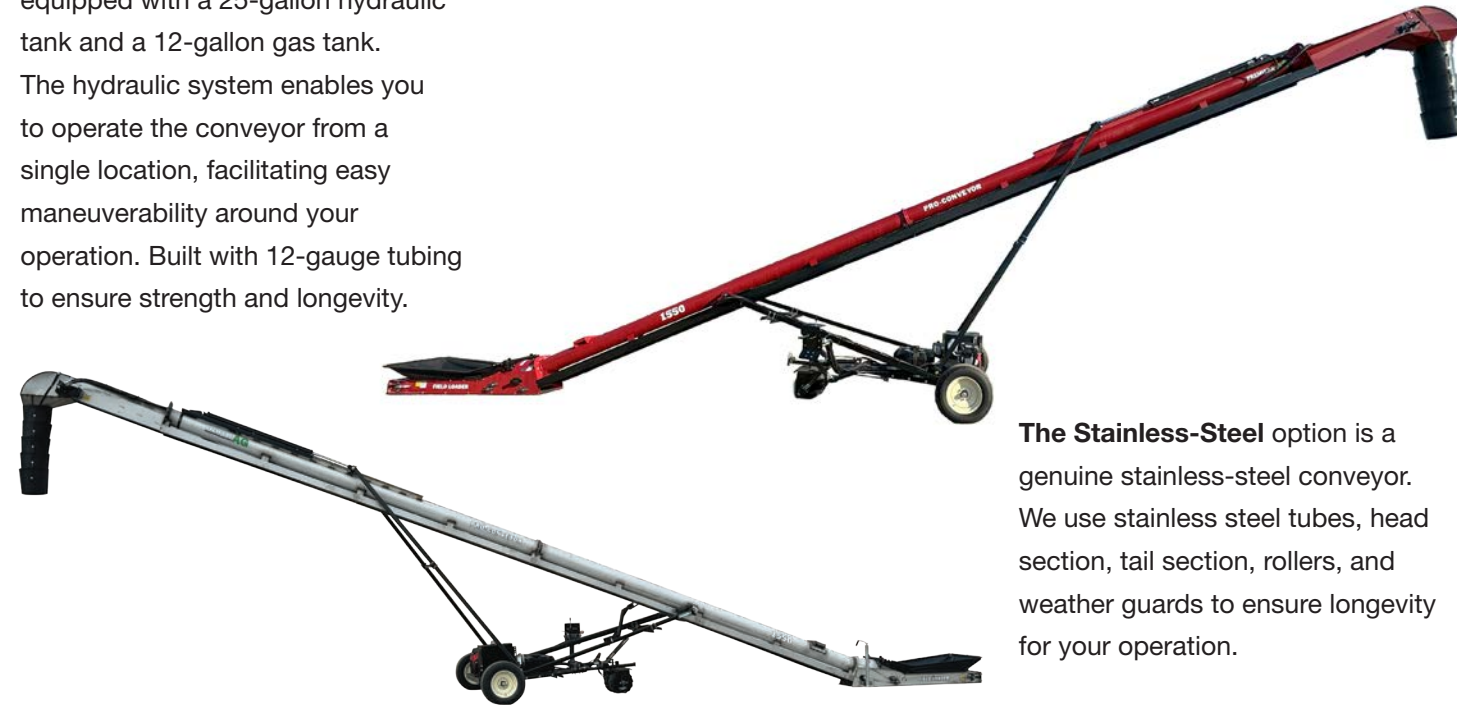

The Stainless-Steel option is a genuine stainless-steel conveyor. We use stainless steel tubes, head section, tail section, rollers, and weather guards to ensure longevity for your operation.



Standard Accessories

- IGX800 Honda 4-Stroke Engine (25hp)
- 25 Gallon Hydraulic Tank
- 12 Gallon Gas Tank
- Foam Filled Mover Wheels
- Wind Guards
- Tail Section Bottom Pan
- Hitch/Hitch Holder
- 5 Tier Bucket Spout
- Swivel Jack

Optional Accessories

- Light Kit

Options

- Mild Steel Powder Coated
- 304 Stainless Steel
- Kohler Command Pro EFI Engine (38hp)
- 40' Conveyor
- 45' Conveyor
- 50' Conveyor
- 55' Conveyor

Operation

- Hydraulic Joystick Controls for Easy and Safe Mobility
- Hydraulic Cylinder on the Main Unit vs Hydraulic Winch to Ensure Safer Operation
- Larger Hopper Size of 34" x 72" to Maximize Capacity
- Easy-Operating Retractable Hopper Canvas
- The battery is hardwired to the engine, eliminating the need for wire harnesses and improving reliability.

Standard Accessories

- Hand Crank Winch
- Wind Guards
- Hitch
- Swivel Jack

Optional Accessories

- Light Kit
- 5 Tier Bucket Spout
- Tail Section Bottom Pan
- Hitch Holder

Options

- Mild Steel Powder Coated
- 304 Stainless Steel
- 40' Conveyor
- 45' Conveyor
- 50' Conveyor
- 55' Conveyor

Operation

- Hand Crank Winch for Easily Raising and Lowering the Conveyor
- Conveyors are specifically balanced for effortless mobility moving around your operation.
- Larger Hopper Size of 34" x 72" to Maximize Capacity
- Easy-Operating Retractable Hopper Canvas